




Immerse yourself in the game with the curved GC2480HSU Red Eagle with 180Hz refresh rate

The 1500R curved VA panel with 180Hz refresh rate and 0.5ms MPRT gives you an immersive viewing experience and guarantees superb image quality. Enhanced by the Black Tuner function, it provides detailed visibility in dark scenes, allowing you to spot every detail, even in low-light settings.

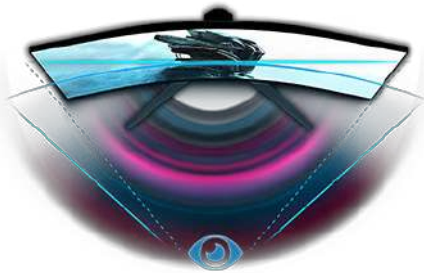

CURVED DESIGN 1500R

The 1500R curvature of the screen guarantees a realistic and comfortable viewing experience allowing you to really immerse yourself in the game.



180Hz & 0.5ms MPRT

With 180Hz refresh rate and 0.5ms MPRT response time the force is with you! Make split second decisions and be sure the image on the screen is always sharp and smooth.

01 DISPLAY CHARACTERISTICS

| | |
|----------------------|---|
| Diagonal | 23,6", 59.8cm |
| Panel | VA |
| Curved | 1500R |
| Native resolution | 1920 x 1080 @180Hz (2.1 megapixel) |
| Aspect ratio | 16:9 |
| Panel brightness | 300 cd/m ² |
| Static contrast | 3000:1 |
| Advanced contrast | 80M:1 |
| Response time (MPRT) | 0.5ms |
| Viewing zone | horizontal/vertical: 178°/178°, right/left: 89°/89°, up/down: 89°/89° |
| Colour support | 16.7mIn (sRGB: 96%, NTSC: 72%) |
| Horizontal Sync | 30 - 200kHz |
| Viewable area W x H | 521.4 x 293.3mm, 20.5 x 11.5" |
| Pixel pitch | 0.271mm |
| Colour | matte, black |

02 INTERFACES / CONNECTORS / CONTROLS

| | |
|---------------------|---|
| Signal input | HDMI x2 (v. 2.0) DisplayPort x1 (v. 1.4) |
| USB HUB | x2 (v.2.0 (DC5V, 500mA)) |
| HDCP | yes |
| Headphone connector | yes |

03 FEATURES

| | |
|-----------------------|---|
| Blue light reducer | yes |
| Flicker free | yes |
| Adaptive Sync support | yes |
| HDR | yes |
| OSD languages | EN, DE, FR, ES, IT, PT, RU, JP, CZ, NL, PL |
| Control buttons | Power, Menu (Up / Submenu, Down / Input Select, Left / ECO, Right / Volume) |
| User controls | picture adjust (contrast, brightness, OD, ACR, ECO, black tuner, colour saturation, motion blur red., AMD FreeSync), input source, audio settings (volume, mute audio), store user settings (user modes), colour settings (6-Axis, gamma, blue light reducer, colour temperature, user preset), image adjust (i-Style Colour, x-res technology, sharpness, RGB range, video mode adjust), language, setup menu (OSD horizontal position, OSD vertical position, OSD time, opening logo, power LED), information, recall |
| Speakers | 2 x 2W |
| Convenience | Kensington-lock™ prepared, DDC2B, Mac OSX |

04 MECHANICAL

| | |
|------------------------------|-----------------|
| Display position adjustments | tilt |
| Tilt angle | 22° up; 4° down |
| VESA mounting | 100 x 100mm |
| Cable management system | yes |

05 ACCESSORIES INCLUDED

| | |
|--------|---------------------------------------|
| Cables | power (1.5m), USB (1.5m), HDMI (1.5m) |
| Other | quick start guide, safety guide |

06 POWER MANAGEMENT

| | |
|-------------------|---|
| Power supply unit | internal |
| Power supply | AC 100 - 240V, 50/60Hz |
| Power usage | 21W typical, 0.5W stand by, 0.3W off mode |

07 SUSTAINABILITY

| | |
|---|--|
| Regulations | CE, TÜV-Bauart, EAC, PSE, RoHS support, ErP, WEEE, VCCI, REACH, UKCA |
| Energy efficiency class (Regulation (EU) 2017/1369) | E |
| REACH SVHC | above 0.1%: Lead |

08 DIMENSIONS / WEIGHT

| | |
|------------------------------|-----------------------|
| Product dimensions W x H x D | 535.5 x 394.5 x 202mm |
| Box dimensions W x H x D | 622 x 408 x 171mm |
| Weight (without box) | 3.8kg |
| Weight (with box) | 6kg |
| EAN code | 4948570124503 |

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.

© IIYAMA CORPORATION. ALL RIGHTS RESERVED